

# SMD Power Inductor

## CDRH80D65B/T150



### 特点

- Magnetically shielded
- L×W×H: 8.6 × 8.2 × 6.8mm Max.
- Product weight: 1.3g (Ref.)
- Qualified AEC-Q200
- Absolute Maximum Voltage (across inductor): 250V
- Vibration resistance: 10Hz~2kHz/30G (MIL standard)



### 环境规格

- Operating Temperature: -55°C to +150°C (including self-heating)


### 包装

- Carrier tape and reel packaging


### 用途

- High temp and high reliability automotive applications


### 外形尺寸 - [mm]

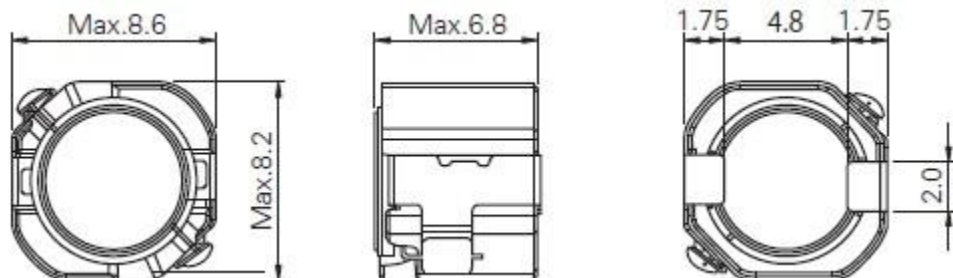

### 推荐焊盘尺寸 - [mm]

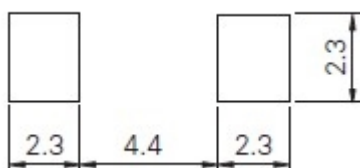

### 接线图 (底面)





### 电气特性规格



品名	电感值 [within] ( $\mu$ H) ※1	直流电阻 (20℃) [Within] (m $\Omega$ )	饱和电流 (A) Max. (Typ.) ※2	温度上升电流 (A) Max. (Typ.) ※3
CDRH80D65BT150NP-1R0NC	1.00 $\pm$ 30%	6.40 $\pm$ 30%	12.10 (14.30)	7.60 (8.74)
CDRH80D65BT150NP-1R5NC	1.50 $\pm$ 30%	7.50 $\pm$ 30%	9.80 (11.60)	6.80 (7.80)
CDRH80D65BT150NP-2R2NC	2.20 $\pm$ 30%	9.60 $\pm$ 30%	8.00 (9.50)	5.80 (6.71)
CDRH80D65BT150NP-3R3NC	3.30 $\pm$ 30%	10.80 $\pm$ 30%	6.50 (7.65)	5.50 (6.35)
CDRH80D65BT150NP-3R9NC	3.90 $\pm$ 30%	11.80 $\pm$ 30%	5.90 (7.05)	5.30 (6.10)
CDRH80D65BT150NP-4R7NC	4.70 $\pm$ 30%	13.20 $\pm$ 30%	5.50 (6.49)	4.80 (5.49)
CDRH80D65BT150NP-6R8NC	6.80 $\pm$ 30%	15.80 $\pm$ 30%	4.50 (5.40)	4.40 (5.02)
CDRH80D65BT150NP-100MC	10.00 $\pm$ 20%	19.80 $\pm$ 20%	3.80 (4.50)	3.90 (4.54)
CDRH80D65BT150NP-150MC	15.00 $\pm$ 20%	35.00 $\pm$ 20%	3.00 (3.55)	2.70 (3.16)
CDRH80D65BT150NP-220MC	22.00 $\pm$ 20%	49.00 $\pm$ 20%	2.40 (2.94)	2.40 (2.83)
CDRH80D65BT150NP-330MC	33.00 $\pm$ 20%	86.00 $\pm$ 20%	2.00 (2.42)	1.60 (1.93)
CDRH80D65BT150NP-470MC	47.00 $\pm$ 20%	105 $\pm$ 20%	1.70 (2.02)	1.50 (1.74)
CDRH80D65BT150NP-680MC	68.00 $\pm$ 20%	131 $\pm$ 20%	1.40 (1.67)	1.30 (1.57)
CDRH80D65BT150NP-101MC	100 $\pm$ 20%	168 $\pm$ 20%	1.10 (1.41)	1.20 (1.37)
CDRH80D65BT150NP-151MC	150 $\pm$ 20%	267 $\pm$ 20%	0.99 (1.17)	0.95 (1.09)
CDRH80D65BT150NP-221MC	220 $\pm$ 20%	475 $\pm$ 20%	0.79 (0.94)	0.64 (0.73)
CDRH80D65BT150NP-331MC	330 $\pm$ 20%	646 $\pm$ 20%	0.65 (0.77)	0.59 (0.67)
CDRH80D65BT150NP-471MC	470 $\pm$ 20%	799 $\pm$ 20%	0.54 (0.64)	0.53 (0.61)
CDRH80D65BT150NP-681MC	680 $\pm$ 20%	1180 $\pm$ 20%	0.45 (0.53)	0.40 (0.46)
CDRH80D65BT150NP-102MC	1000 $\pm$ 20%	1980 $\pm$ 20%	0.36 (0.43)	0.30 (0.35)

※ Measuring frequency inductance at 100kHz, 1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes  $\Delta T=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

### 回流焊耐热与推荐温度曲线图

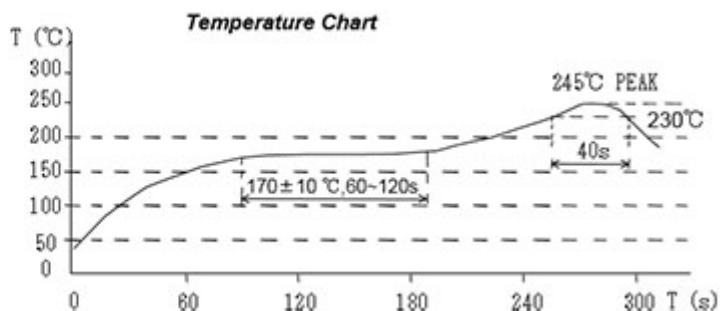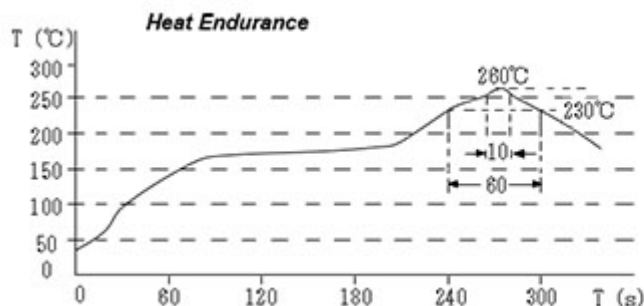

# SMD Power Inductor


## CDRH80D65B/T150



### 直流饱和电流&温度上升曲线图


— L (20°C)    — L (150°C)    — ΔT

1. CDRH80D65BT150NP-1R0NC

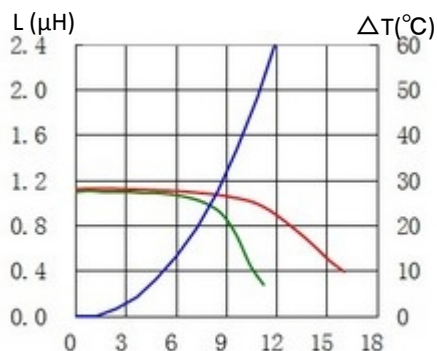


DC(A)

2. CDRH80D65BT150NP-1R5NC

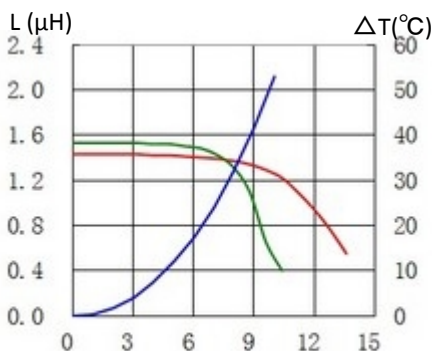


DC(A)

3. CDRH80D65BT150NP-2R2NC

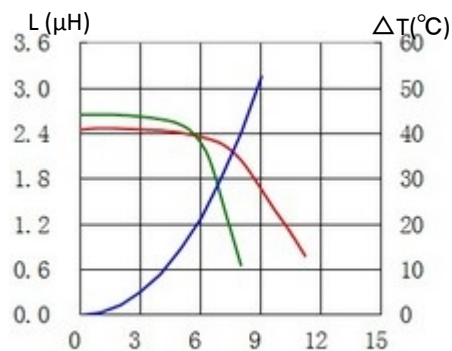


DC(A)

4. CDRH80D65BT150NP-3R3NC

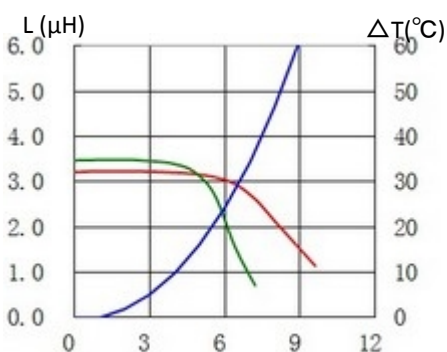


DC(A)

5. CDRH80D65BT150NP-3R9NC

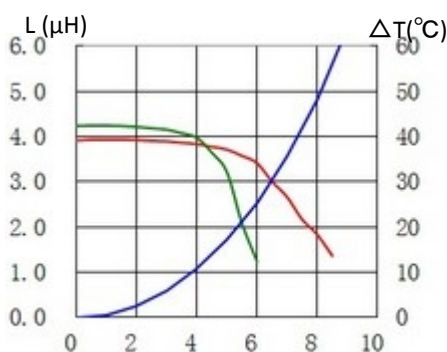


DC(A)

6. CDRH80D65BT150NP-4R7NC

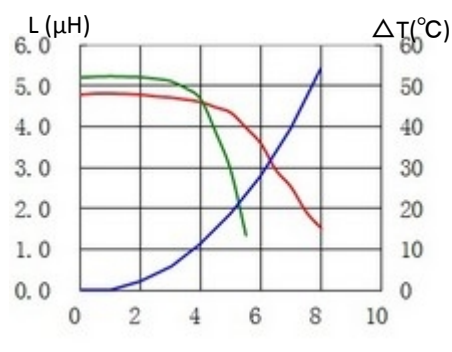


DC(A)

7. CDRH80D65BT150NP-6R8NC

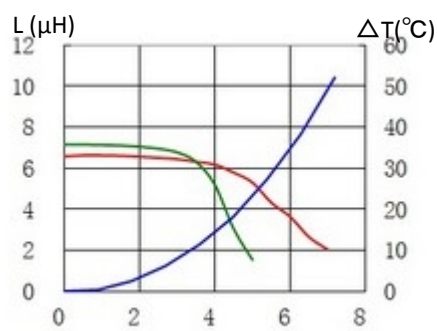


DC(A)

8. CDRH80D65BT150NP-100MC

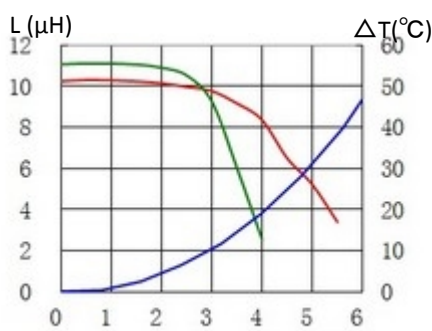

DC(A)

9. CDRH80D65BT150NP-150MC

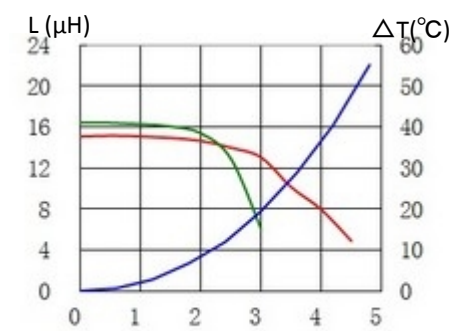

DC(A)


注：记载内容如有变更，恕不另行通知。订货时请联系您最近的销售办事处以获取最新产品信息。

# SMD Power Inductor

## CDRH80D65B/T150




10. CDRH80D65BT150NP-220MC

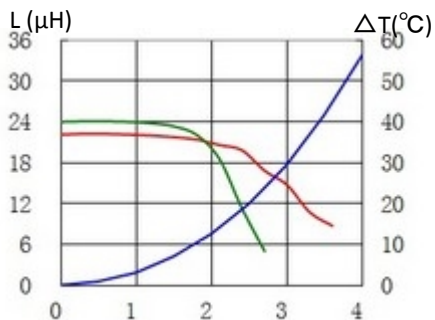


DC(A)

11. CDRH80D65BT150NP-330MC

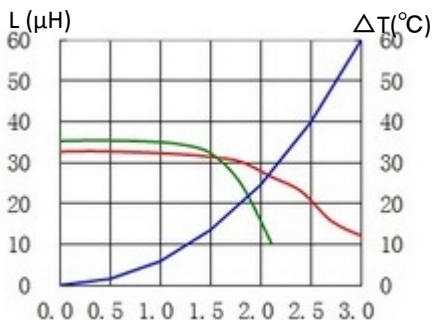


DC(A)

12. CDRH80D65BT150NP-470MC

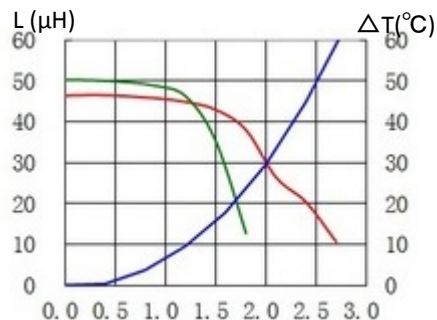


DC(A)

13. CDRH80D65BT150NP-680MC

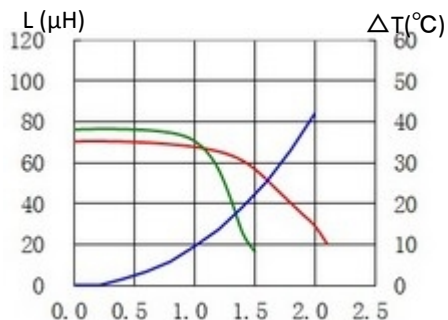


DC(A)

14. CDRH80D65BT150NP-101MC

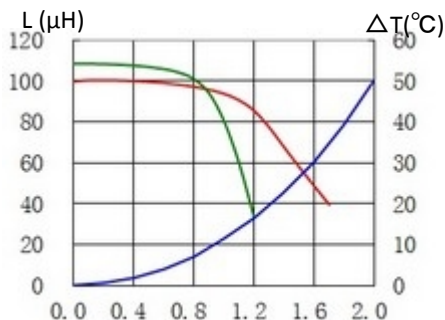


DC(A)

15. CDRH80D65BT150NP-151MC

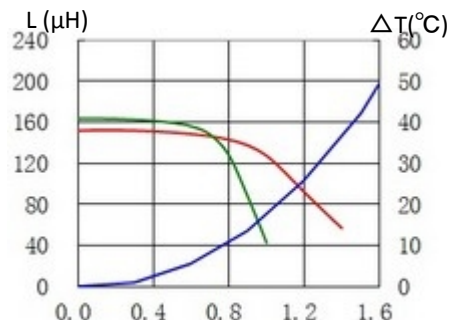


DC(A)

16. CDRH80D65BT150NP-221MC

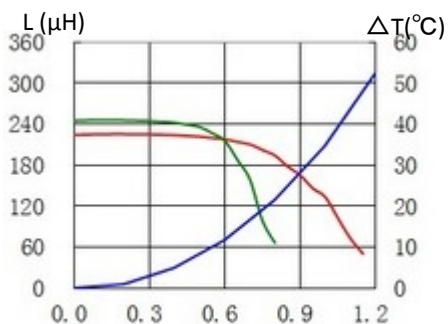


DC(A)

17. CDRH80D65BT150NP-331MC

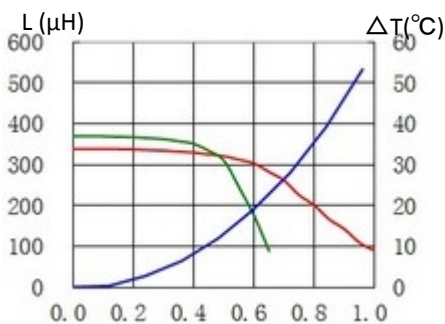

DC(A)

18. CDRH80D65BT150NP-471MC

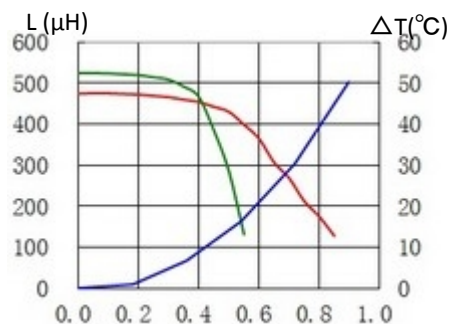

DC(A)


# SMD Power Inductor

## CDRH80D65B/T150




19. CDRH80D65BT150NP-681MC

20. CDRH80D65BT150NP-102MC

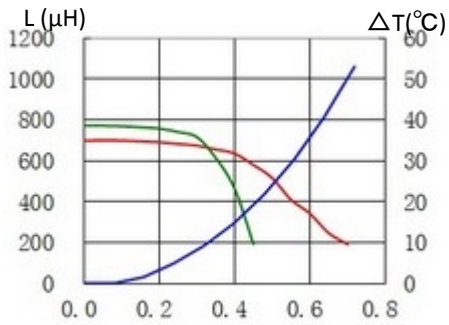

DC(A)

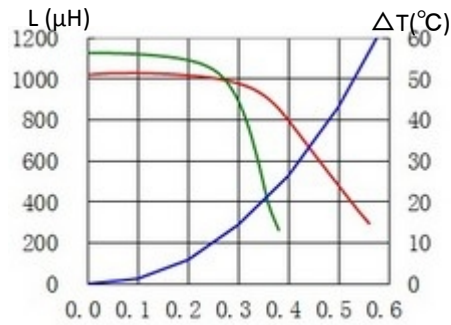

DC(A)



有关销售办事处的信息，请 [点击这里](#)。