

SMD Power Inductor

CDRH40D28/T125



特点

- Ferrite drum core construction.
- Magnetically shielded.
- L×W×H:4.5×4.5×3.0mm Max.
- Product weight:0.13 g (Ref.)
- Moisture Sensitivity Level: 1



环境规格

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage condition of before PCB mounting : Ta: 5~40°C、RH: 20~70%


包装

- Carrier tape and reel packaging.
- 13.0" diameter reel. 2000pcs per reel.


用途

- Automotive application and other high temperature, high reliability application type withstand up to 125°C.


外形尺寸 - [mm]

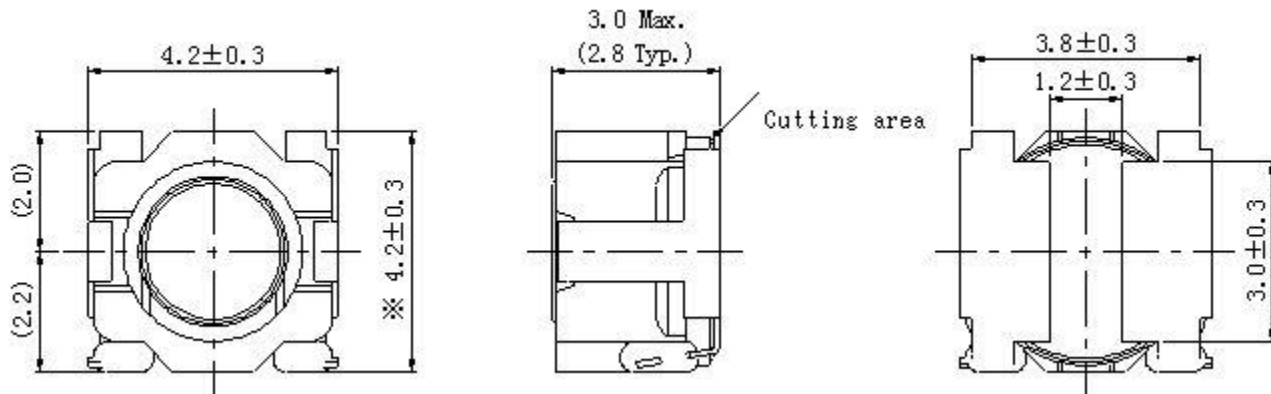

推荐焊盘尺寸 - [mm]



接线图 (底面)





电气特性规格



品名	电感值 [within] (μ H) ※1	直流电阻 (20℃) Max. (Typ.) (m Ω)	饱和电流 (A) Max. (Typ.) ※2		温度上升电流 (A) Max. (Typ.) ※3
			20℃	125℃	
CDRH40D28T125NP-1R5NC	1.50 \pm 30%	43.50 (35.00)	2.20 (2.76)	1.92 (2.41)	(3.00)
CDRH40D28T125NP-1R8NC	1.80 \pm 30%	50.00 (40.00)	2.00 (2.50)	1.76 (2.20)	(2.75)
CDRH40D28T125NP-2R2NC	2.20 \pm 30%	56.00 (45.00)	1.85 (2.32)	1.56 (1.95)	(2.70)
CDRH40D28T125NP-3R3NC	3.30 \pm 30%	68.50 (55.00)	1.59 (1.99)	1.36 (1.70)	(2.35)
CDRH40D28T125NP-4R7NC	4.70 \pm 30%	85.00 (68.00)	1.29 (1.62)	1.12 (1.40)	(2.00)
CDRH40D28T125NP-5R6NC	5.60 \pm 30%	112 (90.00)	1.20 (1.50)	1.03 (1.29)	(1.70)
CDRH40D28T125NP-6R8NC	6.80 \pm 30%	118 (95.00)	1.08 (1.35)	0.93 (1.16)	(1.65)
CDRH40D28T125NP-100NC	10.00 \pm 30%	188 (150)	0.82 (1.02)	0.72 (0.90)	(1.35)
CDRH40D28T125NP-150NC	15.00 \pm 30%	240 (192)	0.72 (0.90)	0.62 (0.77)	(1.20)
CDRH40D28T125NP-220NC	22.00 \pm 30%	338 (270)	0.61 (0.76)	0.53 (0.66)	(0.90)
CDRH40D28T125NP-330NC	33.00 \pm 30%	619 (495)	0.49 (0.61)	0.42 (0.52)	(0.66)

※1 Measuring frequency inductance at 100kHz, 1V.

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 35% lower than its nominal value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

回流焊耐热与推荐温度曲线图

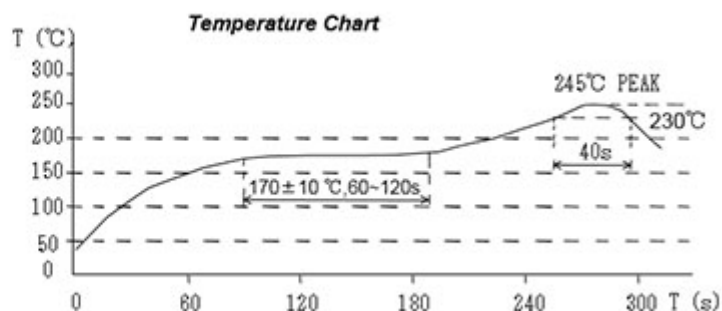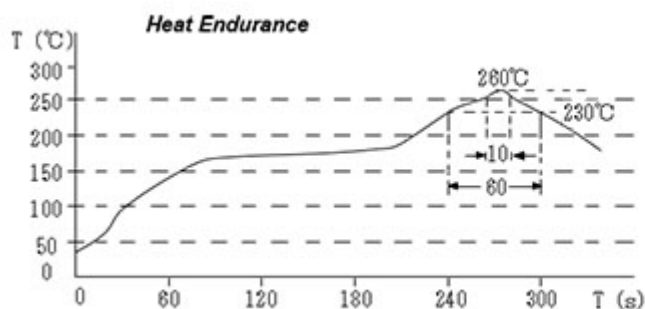

SMD Power Inductor


CDRH40D28/T125




直流饱和电流&温度上升曲线图

— L (20°C) — L (125°C) — ΔT


1. CDRH40D28T125NP-1R5NC

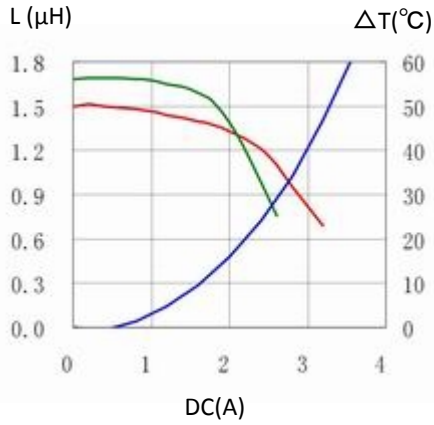


2. CDRH40D28T125NP-1R8NC

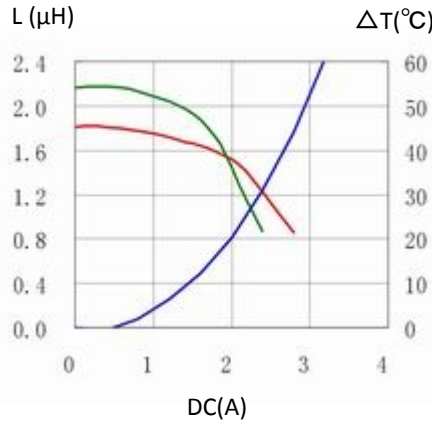


3. CDRH40D28T125NP-2R2NC

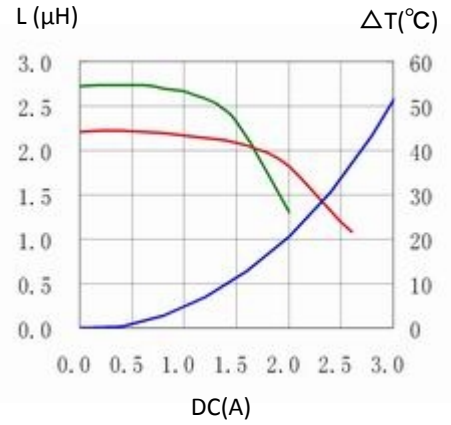


4. CDRH40D28T125NP-3R3NC

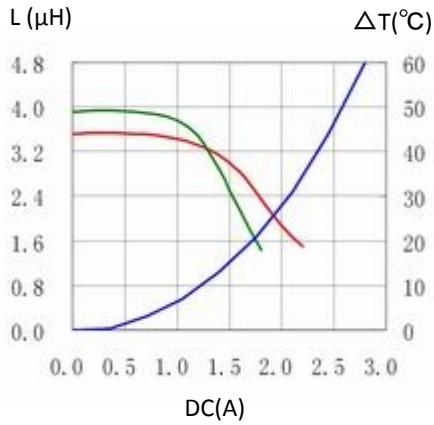


5. CDRH40D28T125NP-4R7NC

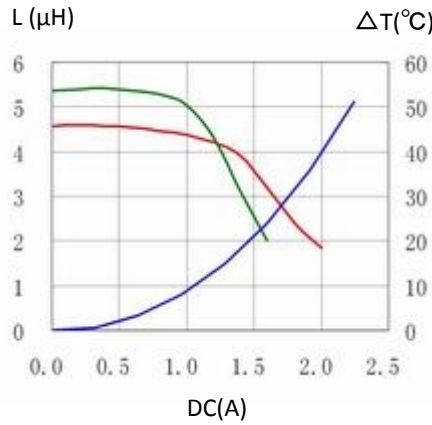


6. CDRH40D28T125NP-5R6NC

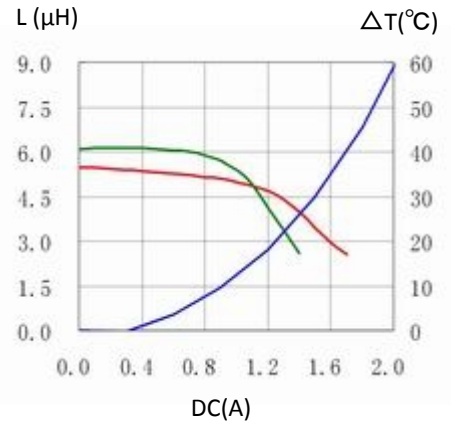


7. CDRH40D28T125NP-6R8NC

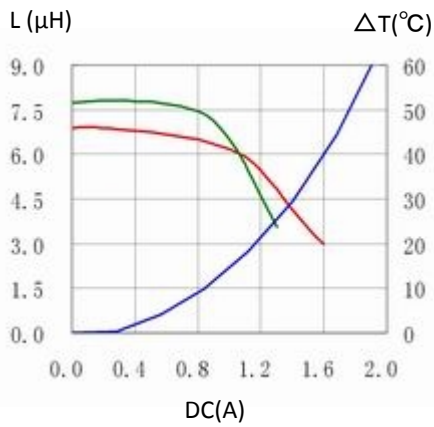

8. CDRH40D28T125NP-100NC

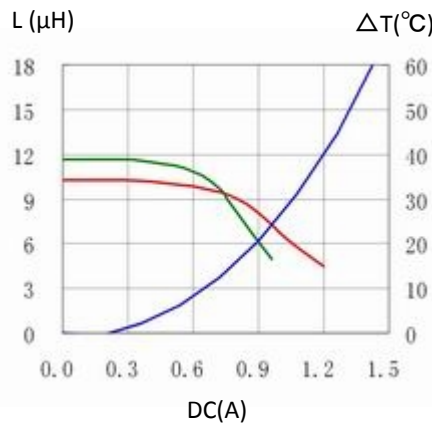

9. CDRH40D28T125NP-150NC

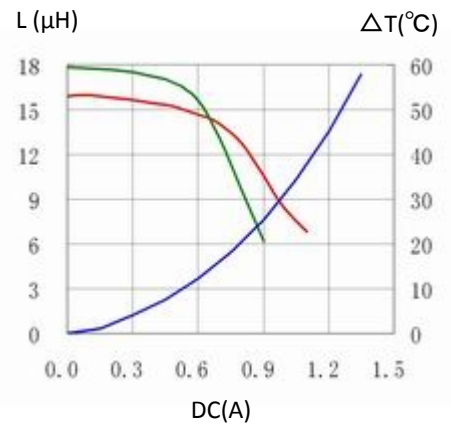

注：记载内容如有变更，恕不另行通知。订货时请联系您最近的销售办事处以获取最新产品信息。



SMD Power Inductor

CDRH40D28/T125



10. CDRH40D28T125NP-220NC

11. CDRH40D28T125NP-330NC

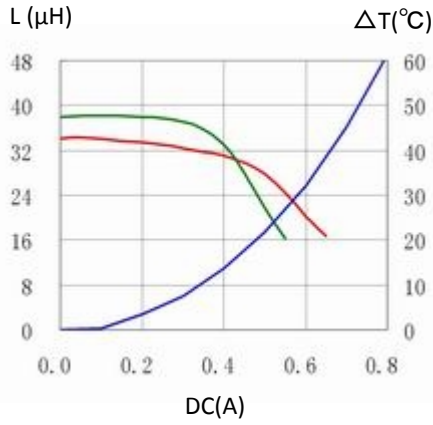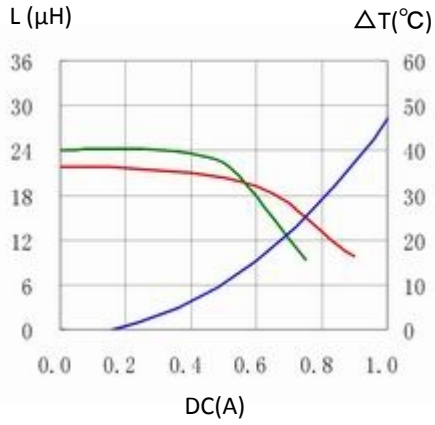

有关销售办事处的信息，请 [点击这里](#)。