


# SMD Power Inductor CDPQ2010



## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 24.4 × 21.0 × 11.0 mm Max.
- Product weight: 15.8 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Pallet packaging.


## Applications

- Power supply of portable base station, +48Vdc input environment power supply used for industrial instrument.

## Dimension - [mm]

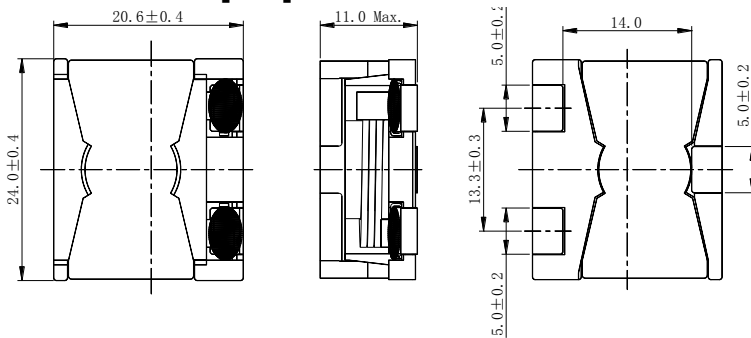

## Land pattern and Schematics - [mm]

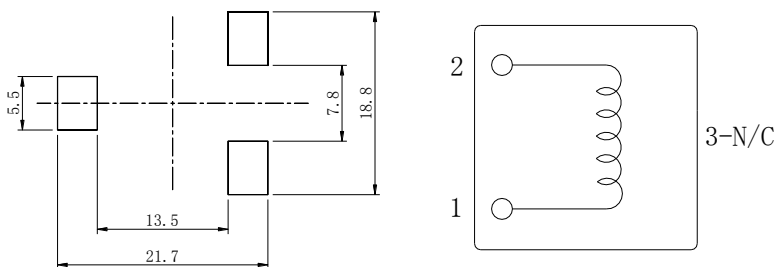



## Electrical Characteristics - 1

NO.	Part No.	Stamp	Inductance ( $\mu\text{H}$ ) [Within] ※1	D.C.R. ( $\text{m}\Omega$ ) [Max.] (at 20°C)	The saturation current (A) ※2		Temperature rise current (A) ※3
					20°C	125°C	
01	CDPQ2010NP-2R7M-160	2R7MH	2.7 $\pm$ 20%	2.00(1.65)	29.2(36.5)	20.4(25.5)	21.0
02	CDPQ2010NP-3R9M-160	3R9MH	3.9 $\pm$ 20%	2.40(2.00)	23.5(29.4)	16.4(20.5)	20.0
03	CDPQ2010NP-5R6M-160	5R6MH	5.6 $\pm$ 20%	3.45(2.85)	19.2(24.0)	13.2(16.6)	17.0
04	CDPQ2010NP-7R5M-160	7R5MH	7.5 $\pm$ 20%	4.68(3.90)	17.0(21.3)	11.8(14.8)	14.0
05	CDPQ2010NP-100M-160	100MH	10 $\pm$ 20%	5.80(4.85)	14.6(18.3)	10.1(12.7)	12.6

## Electrical Characteristics - 2

NO.	Part No.	Stamp	Inductance ( $\mu\text{H}$ ) [Within] ※1	D.C.R. ( $\text{m}\Omega$ ) [Max.] (at 20°C)	The saturation current (A) ※2		Temperature rise current (A) ※3
					20°C	125°C	
06	CDPQ2010NP-3R9M-250	3R9MS	3.9 $\pm$ 20%	2.00(1.65)	19.0(23.8)	13.2(16.6)	21.0
07	CDPQ2010NP-6R2M-250	6R2MS	6.2 $\pm$ 20%	2.40(2.00)	15.7(19.6)	11.0(13.7)	20.0
08	CDPQ2010NP-8R8M-250	8R8MS	8.8 $\pm$ 20%	3.45(2.85)	12.4(15.5)	8.7(10.9)	17.0
09	CDPQ2010NP-120M-250	120MS	12 $\pm$ 20%	4.68(3.90)	10.8(13.5)	7.5(9.4)	14.0
10	CDPQ2010NP-150M-250	150MS	15 $\pm$ 20%	5.80(4.85)	9.7(12.1)	6.6(8.3)	12.6

## Electrical Characteristics - 3

NO.	Part No	Stamp	Inductance ( $\mu\text{H}$ ) [Within] ※1	D.C.R. ( $\text{m}\Omega$ ) [Max.] (at 20°C)	The saturation current (A) ※2		Temperature rise current (A) ※3
					20°C	125°C	
11	CDPQ2010NP-4R7M-300	4R7ML	4.7 $\pm$ 20%	2.00(1.65)	15.6(19.5)	11.0(13.8)	21.0
12	CDPQ2010NP-7R5M-300	7R5ML	7.5 $\pm$ 20%	2.40(2.00)	12.3(15.4)	8.6(10.7)	20.0
13	CDPQ2010NP-100M-300	100ML	10 $\pm$ 20%	3.45(2.85)	10.3(12.9)	7.0(8.8)	17.0
14	CDPQ2010NP-140M-300	140ML	14 $\pm$ 20%	4.68(3.90)	9.8(12.3)	6.9(8.6)	14.0
15	CDPQ2010NP-180M-300	180ML	18 $\pm$ 20%	5.80(4.85)	7.7(9.6)	5.3(6.7)	12.6

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t = 25^\circ\text{C}$  ( $T_a = 20^\circ\text{C}$ ).

# SMD Power Inductor CDPQ2010




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) —  $\Delta T$



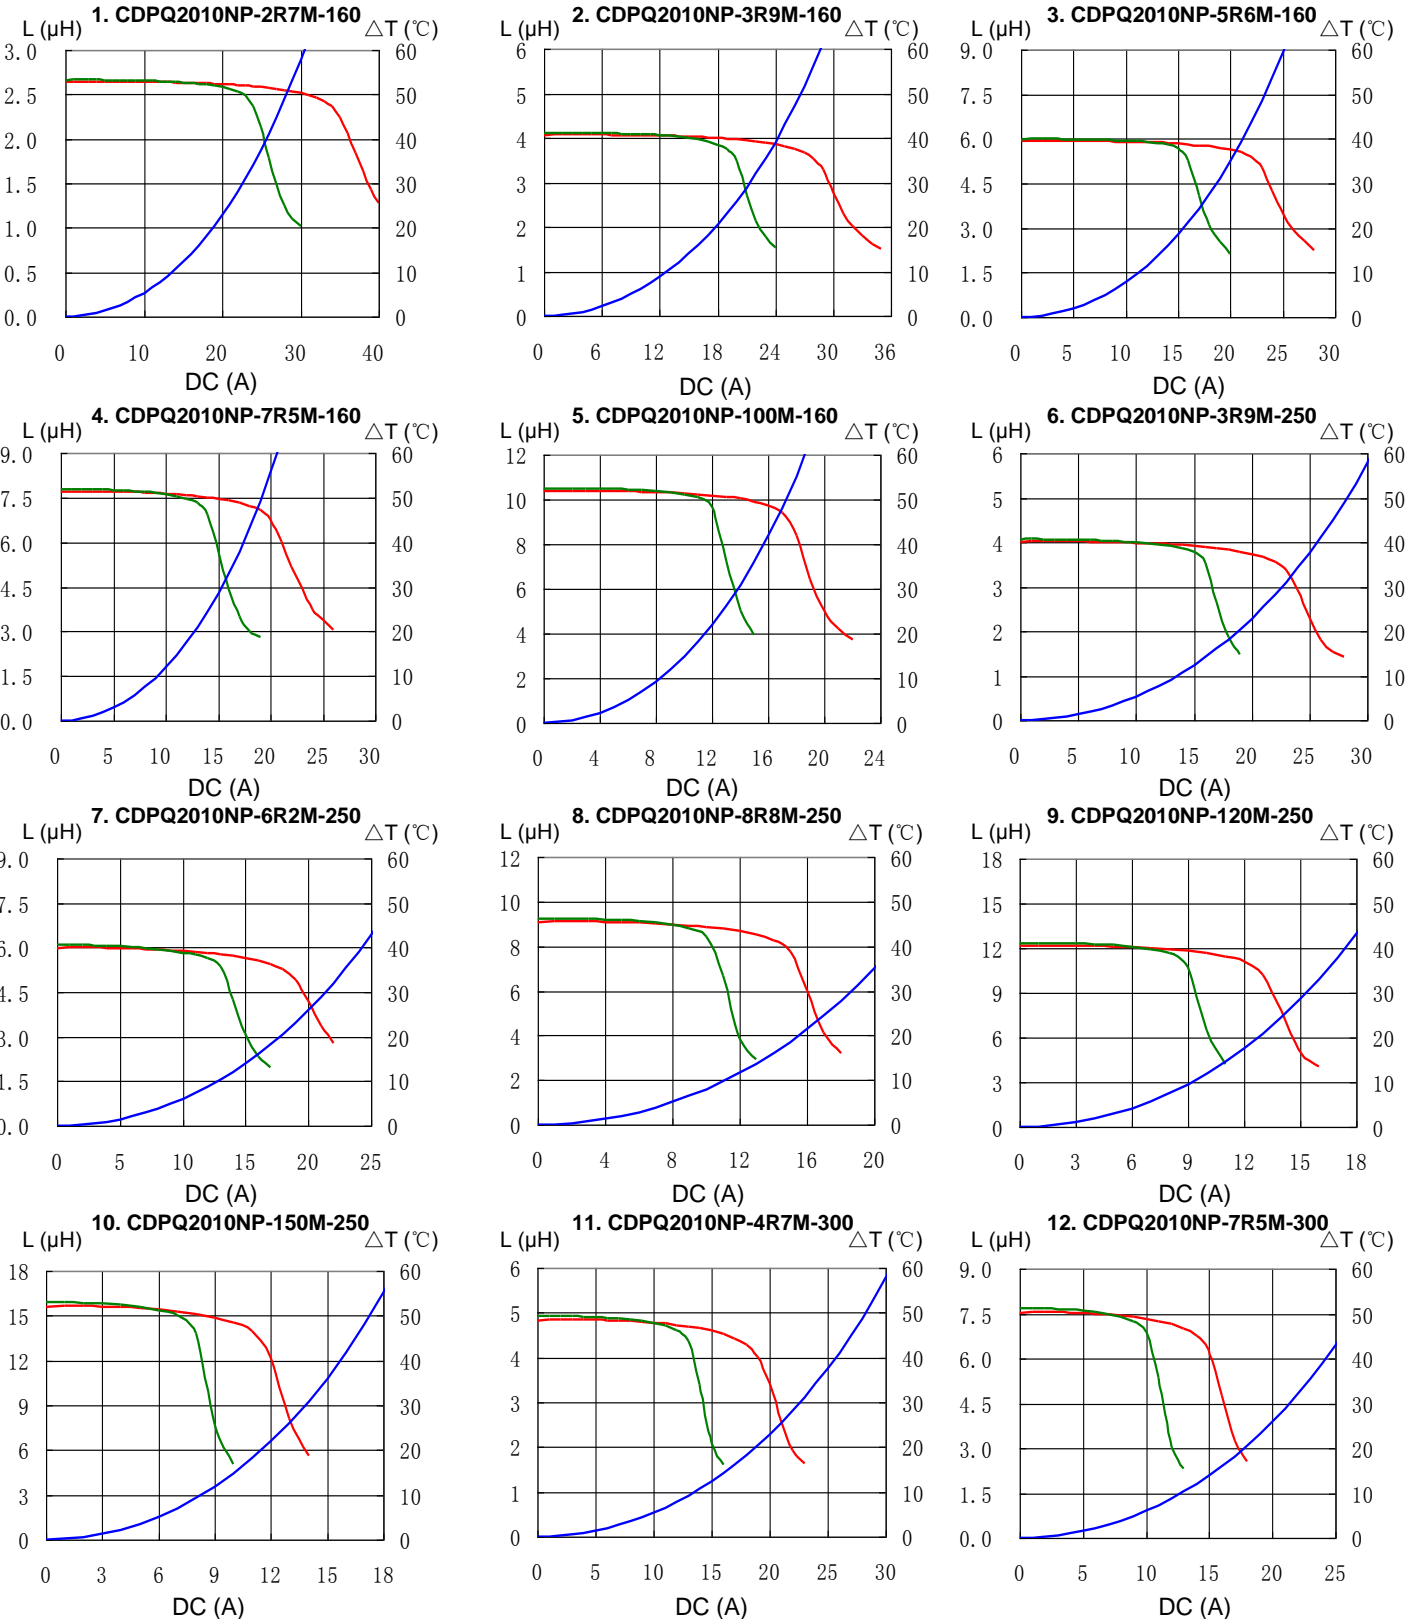


# SMD Power Inductor CDPQ2010

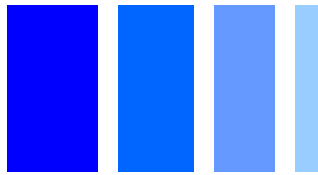


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) —  $\Delta T$

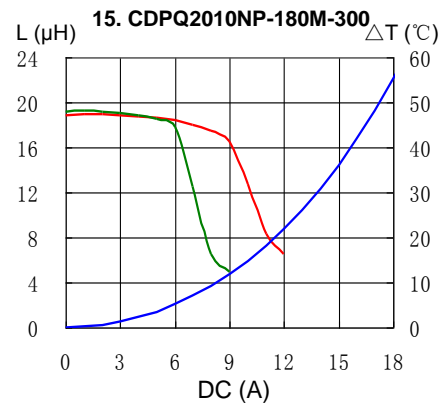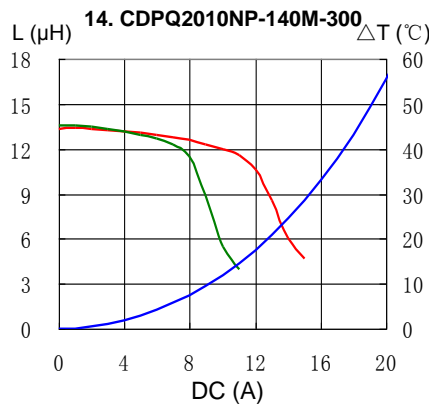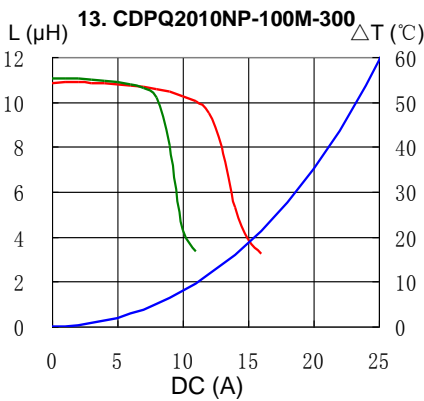


## Solder Reflow Condition

**Heat Endurance**

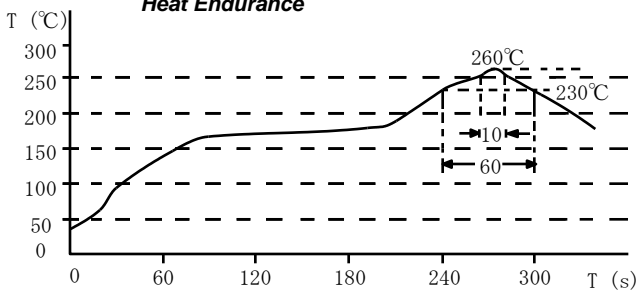

**Temperature Chart**

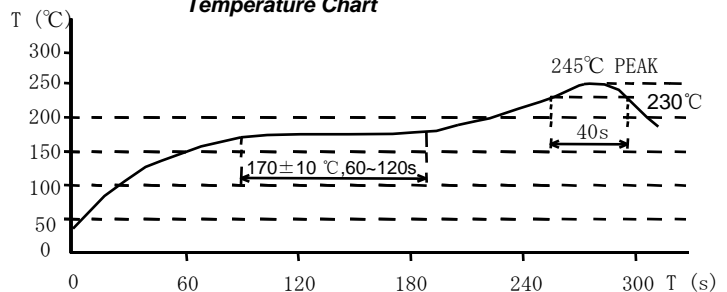

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)